



Data sheet 3MV 350-1






Side channel blower with IE2-motors



Performance curve for Vacuum pump

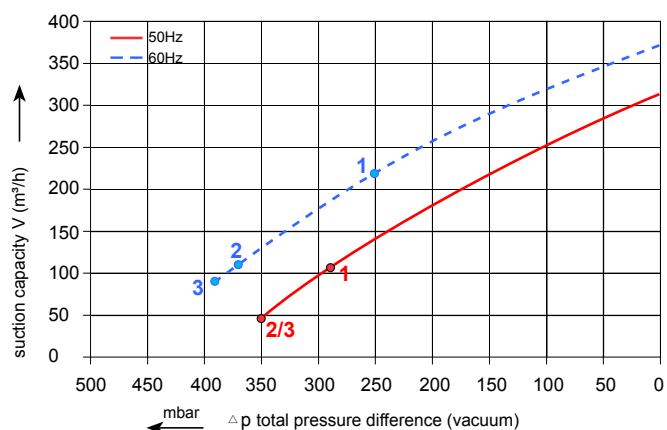

Performance curve for Compressor

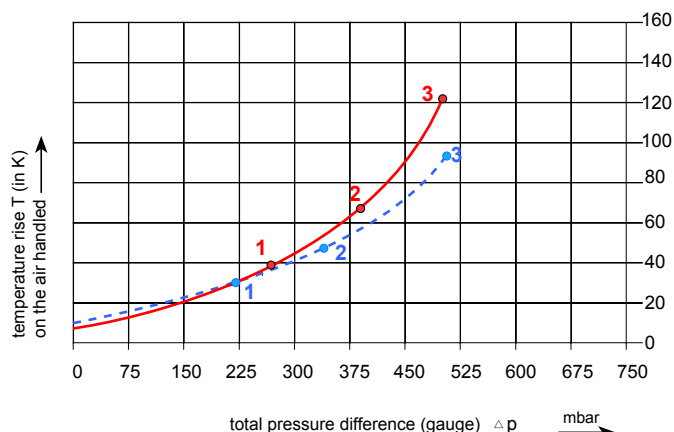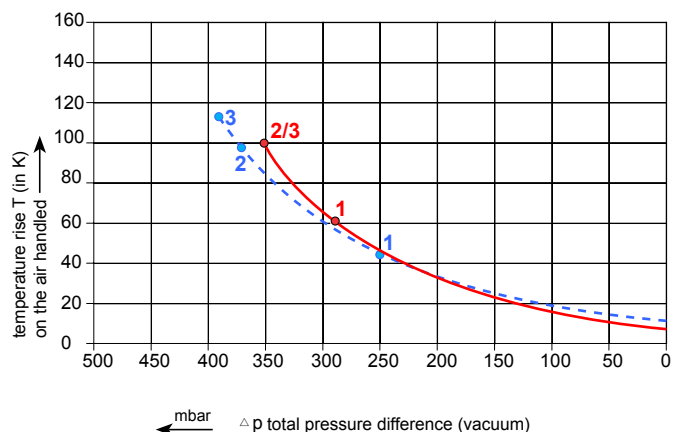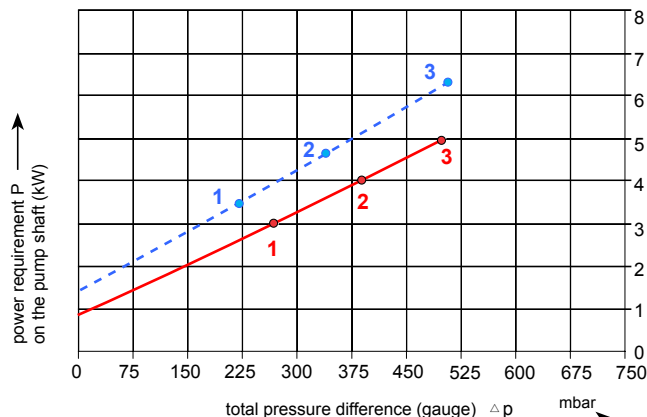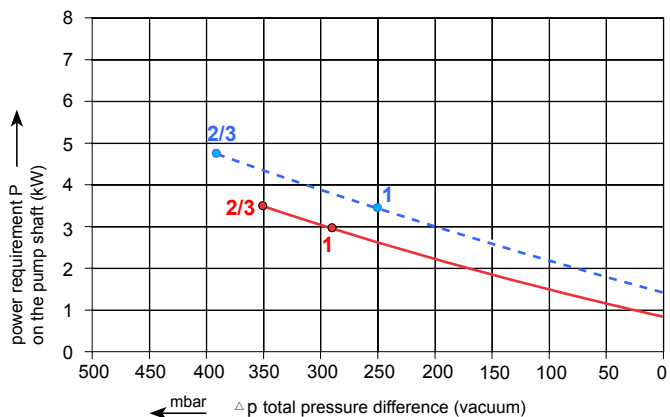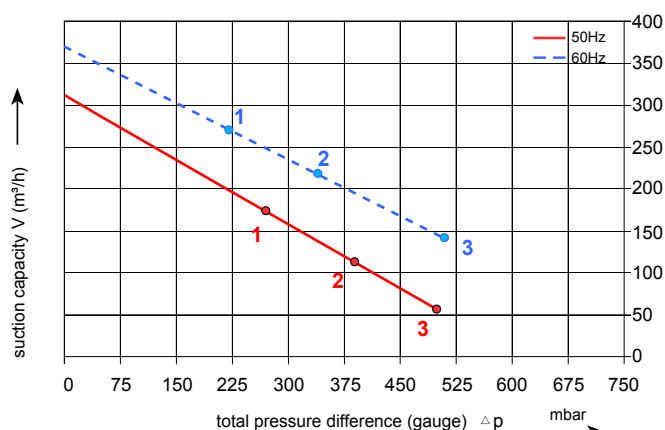

The performance curves are based on air at a temperature of 15 °C and atmospheric pressure of 1013 mbar with a tolerance of +/- 10 %. The total pressure differences are valid for suction and ambient temperatures up to 25 °C. For other conditions please confer with us.

Each 3MV type can be applied both as vacuum pump and compressor in continuous operation over the total stated performance curve range. The motors are available as standard for the input voltage range of 50 and 60 Hz and for protection category IP 55.

Selection and ordering data

Type 3MV350-1

Curve No.	Order No.	Frequency	Rated Power	Input voltage	Input current	Permissible total differential pressure ²⁾		Sound pressure level ³⁾	Weight ca.
		Hz	KW	V	A	Vacuum mbar	Compressor mbar	dB(A)	kg
3~ 50/60 Hz IP55 insulation material class F									
1	3MV 350-1AAT26	50	3.0	200-260 △ /350-450Y	11.4 △ /6.5Y	-290	270	65	54
		60	3.45	230-290 △ /400-500Y	10.8 △ /6.2Y	-250	220	69	
2	3MV 350-1AAT37	50	4.0	350-450 △ /610-725Y	8.4 △ /4.8Y	-350	390	66	66
		60	4.6	400-500 △ /690-725Y	8.2 △ /4.7Y	-370	340	70	
3	3MV 350-1AAT47	50	5.5	350-450 △ /610-725Y	11.1 △ /6.4Y	-350	500	70	77
		60	6.3	400-500 △ /690-725Y	11.0 △ /6.4Y	-390	510	70	

Other voltage ranges

50 Hz	50 Hz Voltage range	60 Hz Voltage range	86 Hz(5000 rpm)	100 Hz(6000 rpm)	3MV...		
3 IE2/							
200 V D/345 V Y 500 V Y 230 V D/400 V Y 400 V D/690 V Y	180-240 V D /310-415 V Y 450-550 V Y 200-260 V D /350-450 V Y 350-450 V D /610-725 V Y	200...275 V D/345...480 V Y 520...600 V Y 230...290 V D/400...500 V Y 400...500 V D/690...725 V Y	----- ----- 400 V D -----	400 V D ----- ----- -----		T T T T	1 3 6 7

3) Performance can different if standard motors are used.Please refer to corresponding data sheets.

